

LOOKING FOR **CRYSTAL CLEAR** PICTURE AND SOUND?



• **Cable/Sat Protection**

Protects equipment from electrical surges that travel over Cable, Satellite, and Antenna lines.



• **Telephone Line Protection**

Protects equipment from electrical surges that travel over Telephone lines.



• **8 Outlets**

8 filtered and surge protected outlets.



• **Surge Protection**

Exclusive Protect or Disconnect™ circuitry. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.



• **Hi Def Ready**

Hi-Def Designed to work with your High Definition system.

## PM8-HT

### HOME THEATER POWER MANAGEMENT

**1** **Improves Picture and Sound Quality**

The PM8-HT's Power Cleaning and Filtration eliminate common symptoms of contaminated power (including loss of detail, pops, hisses, hums and visual artifacts) and allows your AV equipment to perform up to its full capability.


**2** **Surge Protection**

Panamax's Exclusive Protect or Disconnect™ circuitry. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.



# PM8-HT

# PM8-HT FEATURES

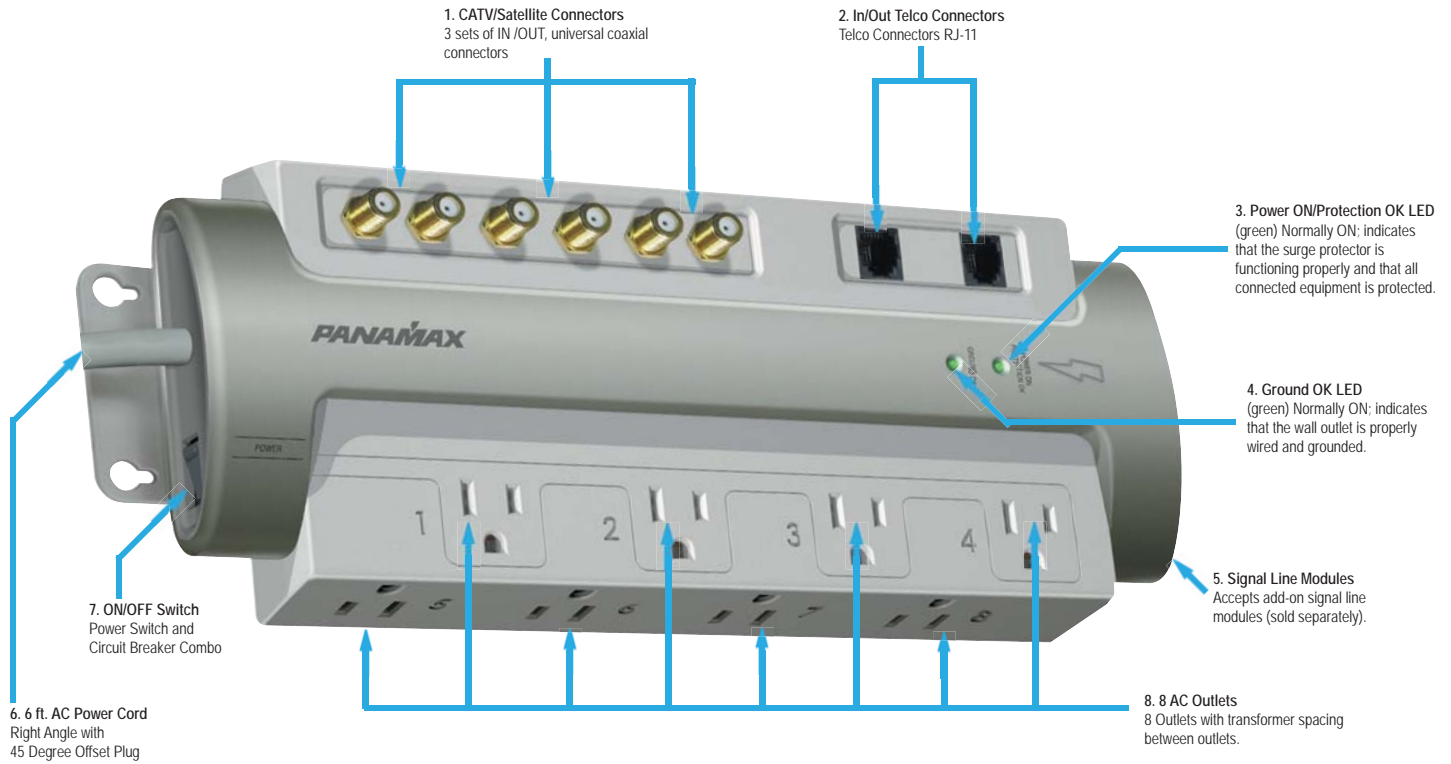

# PM8-HT SPECIFICATIONS

<p><b>General</b></p> <p>Dimensions:..... 12 in. L x 5 in. W x 1.75 in H (12.5 in. L Including brackets)          Weight:..... 3.5 lbs.</p> <p><b>AC Specifications</b></p> <p>Protect or Disconnect™ Circuitry:..... Yes          Thermal Fusing:..... Yes          Line Voltage:..... 120VAC, 50/60Hz          Initial Clamping Level:..... 200V Peak, 141V RMS          UL1449 Suppression Rating:..... 330V          Protection Modes:.....L-N, L-G, N-G          Maximum Current Rating:..... 15 A (1800W)          EMI/RFI Noise Filtration:..... 45 dB(100 KHz - 1MHz)          Response Time:..... &lt; 1ns          Single Pulse Energy Dissipation:..... 1125 Joules          Peak Impulse Current:..... 52,000 A</p>	<p><b>Telco Protection</b></p> <p>Fuseless/Auto-Resettable:.....Yes          Clamping Level:.....260V          Capacitance:.....30pf (approx.)          Suppression Modes:.....Metallic &amp; Longitudinal          Wires Protected:..... 2 wire, 1 pair (3,4)          Connectors:..... RJ-11</p> <p><b>Universal Cable / Satellite Protection</b></p> <p>HD Ready:.....Yes          Bi-Directional:.....Yes          Shielded:.....Yes          Clamping Level:.....75V          Frequency Range:.....0MHz - 2.2 GHz          Insertion Loss:.....&lt; 0.5 dB          Connections:.....Female "F", Gold Plated</p>
---	---

Design and specifications subject to change without notice due to product improvement.

# UPC'S, QUANTITIES, WEIGHTS & MEASUREMENTS FOR ORDERING & SHIPPING

MODEL PM8-HT		UNIT CARTON			MASTER CARTON			
Dimensions	Weight	Dimensions	Weight	UPC	Qty	Dimensions	Weight	UPC
12" x 5" x 1.75" w/brackets 12.5" x 5" x 1.9"	3.5 lbs	13.25" x 9.5" x 2.5"	4 Lbs	0 50616 00827 3	6	17.25" x 8.5" x 14"	20 Lbs	5 0050616 00827 8



1690 Corporate Circle, Petaluma, CA. 94954 800-472-5555 or 707-283-5900 Fax 707-283-5901 www.panamax.com

© 2007 Panamax, Inc. Panamax, MAX, and the Panamax logo are registered US trademarks of Panamax

L589 REV B 8/07